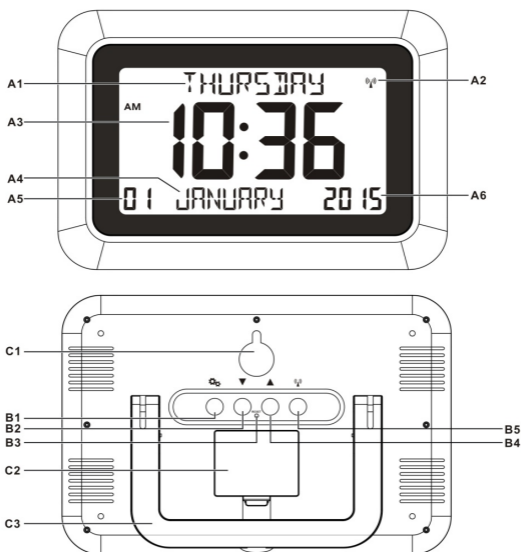


VISO10 –MSF (UK)

1. Features

- Easy to Read and Understand Time display
- Perpetual Calendar Up to Year 2099
- Day of week & Month in 8 languages user selectable

2. Unit appearance



Part A-LCD

A1: Day Of Week

A2: Radio Control Icon

A3: Time

A4: Month

A5: Date


A6: Year

Part B-Button

B1: “MODE/  ” Button

B4: “▲” Button

B2: “▼” Button

B5: “WAVE/  ” Button

B3: “RESET” Button

Part C-Structure

C1: Hanging Hole

C2: Battery Door

C3: Stand

3. Getting started:


- Open battery Cover (C2)
- Insert 2 x AA size batteries observing polarity

["+ and -"marks]. There is "click" sound when insert batteries to remind user the batteries was inserted correctly.


- Replace battery compartment cover
- Place the unit onto flat surface; the unit is ready for use now.




4. Time setting


4.1 Manual Time Setting:

- In time display, hold "MODE/" button (B1) for 3 seconds to enter Clock/Calendar setting Mode.
- Press "▼" (B2) or "▲" (B4) button to adjust the setting and press "MODE" button (B1) to confirm each setting.
- (By keeping the "▼" (B2) or "▲" (B4) button pressed, could accelerate the process and reach the desired value more quickly)
- The setting sequence is shown as follow:, Weekday& Month Language, 12/24 Hr, RCC (Radio Clock) ON/OFF, Time Zone, Hour, Minute, Year, Month, Day.
- There are 8 languages, English, German, French, Spanish, Italian, Dutch, Polish and Swedish, for day-of-week & Month.




4.2 Radio Controlled Time:

- After the start-up of the unit, the clock automatically starts to scan the MSF time signal. Radio Control Icon "" (A2) flashes on LCD.

 (A2) flashes, Indicating now is receiving MSF signal	 (A2) turns on, Indicating signal received successfully	 (A2) disappears, Indicating signal reception failed
---	---	--






- The clock automatically synchronizes with the MSF radio signal every day at 2.00 am to maintain accurate time keeping. If synchronization with the MSF radio signal fails, "" on LCD disappears and the clock

then attempts to synchronize with the MSF radio signal at 3.00 am and 4am.

- The clock can be set to scan the radio signal manually by holding “” button (B5) for 3 seconds. Each reception takes around several minutes. If receptions fail, scanning stops. (“” on LCD disappear) and repeats again on next full hour. E.g. scanning failed at 8:20a.m. It will scan again at 9:00a.m.
- Stop scanning MSF radio signal by holding “” button (B5) for 3 seconds.
- “DST” shown on the LCD if it is in Daylight Saving Time Mode

Note: All Setting mode will automatically exit in around 15 seconds without any adjustment

5. Lock buttons

- Hold “” (B2) and “” (B4) button at the same time for 5 seconds to lock the rest buttons. When rest buttons’ functions been locked, icon “” displayed. Hold “” (B2) and “” (B4) button 5 seconds again to unlock.

6. Precautions

- The clock loses its time information when the battery is removed.
- Use a pin to press the reset button if the Unit does not work properly.
- Do not expose it to direct sunlight, heavy heat, cold, high humidity or wet areas
- Never clean the device using abrasive or corrosive materials or products. Abrasive cleaning agents may scratch plastic parts and corrode electronic circuits