Setup guide

Unpack

Power



A1600BT DECT 6.0 Amplified Cordless Phone





Telephone handset



A1600BT base station



Telephone cord



AC power adapter assembly



Three rechargeable AAA NiMH batteries




Carrying clip



User's Guide Please refer to this guide for additional instructions.

Plug in



Charge



1



Prior to use, charge for 24 hours.





? Call

4 Volume

Place	Answer	End
1. Dial * 0 #. 2. Press 4.	1. Lift 2. Press 4.	Press .

Place	Answer	End
1. Press Speaker	Press Speaker.	Press Speaker.
2. Dial *0 #.		

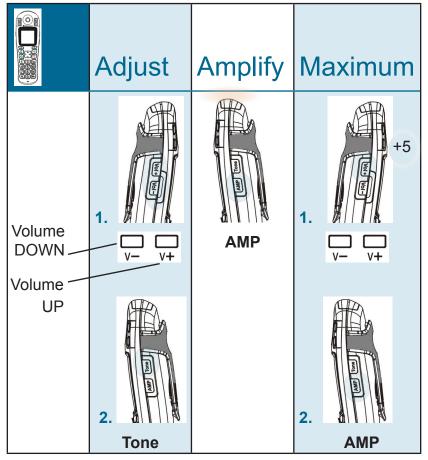

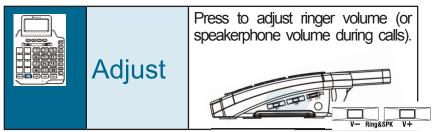

5 Messages



If you prefer to retrieve your messages by using voicemail through your telephone service provider, do not turn on the answering machine.

To retrieve your messages using the A1600BT answering machine, take these steps. (Use the base).

Turn on the answering machine

- 1. Menu
- 2. To TAM setup, Select
- 3. Select

Record your outgoing message

- 1. Menu
- 2. To TAM setup, Select
- 3. To Outgoing Msg, Select
- 4. To Record OGM, Select
- **5.** After the tone, speak to record, **End**

